


Data Sheet


CR1025

Nominal Voltage	3 V	Dimensions (mm) 
Nominal Capacity	25 mAh	
Standard Load	68 KΩ	
Standard Current	0.05 mA	
Max Pulse Current	5 mA	
Operating Temperature	-20~60°C	
Weight	0.55 (g)	
Chemistry	Lithium / Manganese Dioxide	
UL Certification	MH10136	


A	$\Phi 7.94^{+0}_{-0.04}$
B	$\Phi 10.0^{+0}_{-0.15}$
C	$1.85^{+0}_{-0.05}$
D	$2.5^{+0}_{-0.2}$

Note: Capacity is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

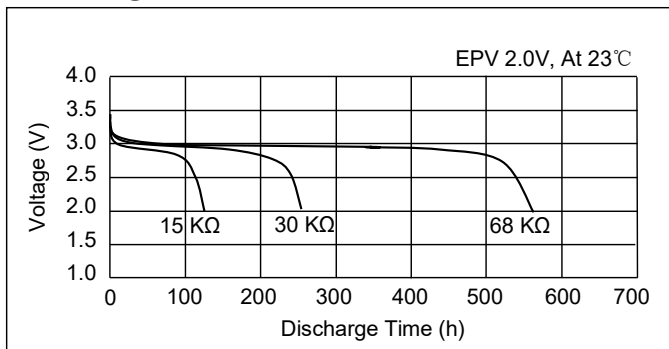

Temperature Characteristics

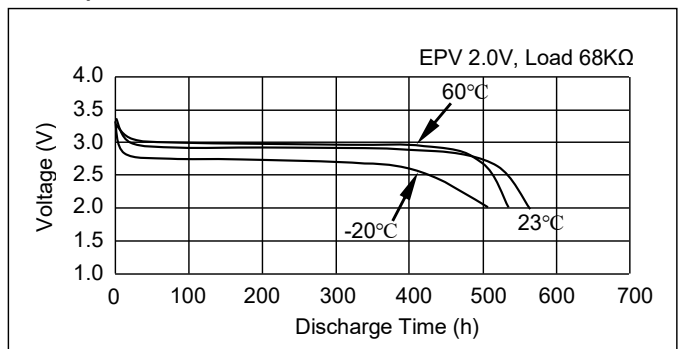

Pulse Discharge Characteristics

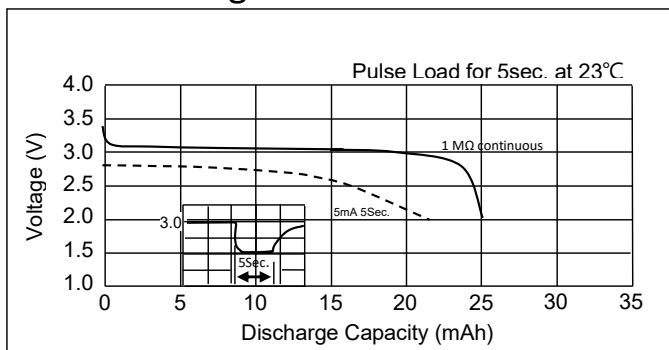

Load vs. Capacity

